

Lecture 14: Graphs II: Depth-First Search

Lecture Overview

- Depth-First Search
- Edge Classification
- Cycle Testing
- Topological Sort

Recall:

- graph search: explore a graph
e.g., find a path from start vertex s to a desired vertex
- adjacency lists: array Adj of $|V|$ linked lists
 - for each vertex $u \in V$, Adj[u] stores u 's neighbors, i.e., $\{v \in V \mid (u, v) \in E\}$
(just outgoing edges if directed)

For example:

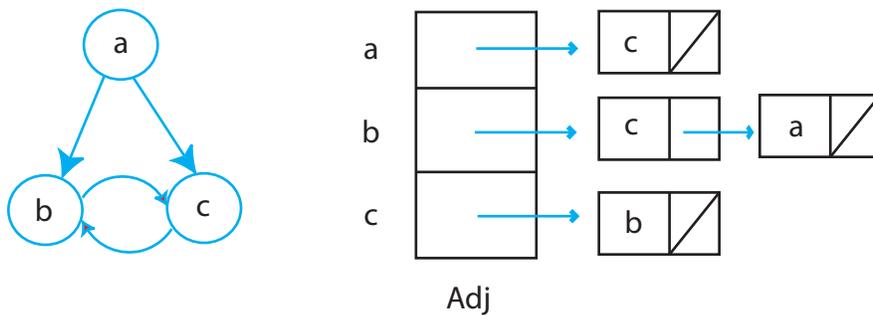


Figure 1: Adjacency Lists

Breadth-first Search (BFS):

Explore level-by-level from s — find shortest paths

Example

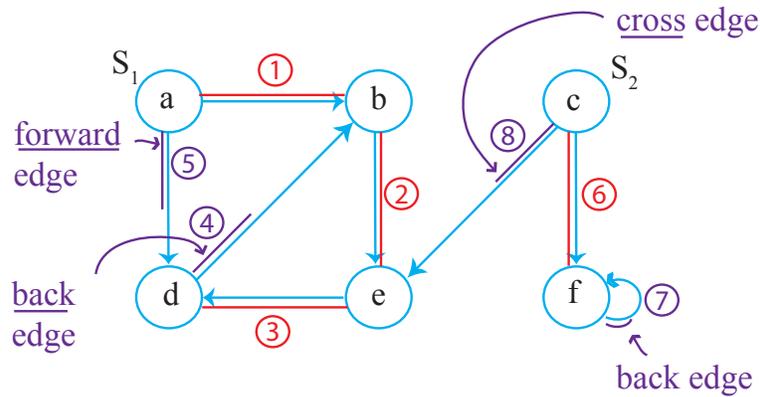


Figure 4: Depth-First Traversal

Edge Classification

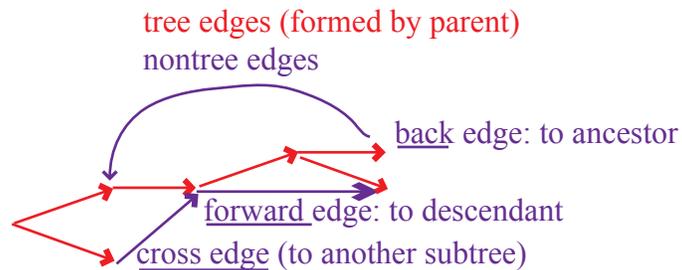


Figure 5: Edge Classification

- to compute this classification (**back or not**), mark nodes for duration they are “on the stack”
- only tree and back edges in undirected graph



Analysis

- DFS-visit gets called with a vertex s only once (because then $\text{parent}[s]$ set)
 \implies time in DFS-visit = $\sum_{s \in V} |\text{Adj}[s]| = O(E)$
- DFS outer loop adds just $O(V)$
 $\implies O(V + E)$ time (**linear time**)

Cycle Detection

Graph G has a cycle \Leftrightarrow DFS has a back edge


Proof

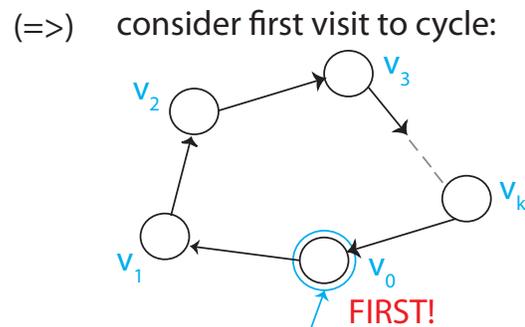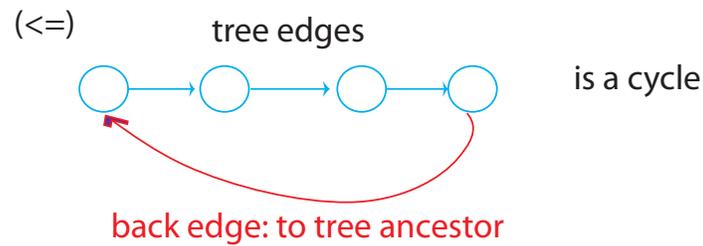

- before visit to v_i finishes,
will visit v_{i+1} (& finish):
will consider edge (v_i, v_{i+1})
 \Rightarrow visit v_{i+1} now or already did
- \Rightarrow before visit to v_0 finishes,
will visit v_k (& didn't before)
- \Rightarrow before visit to v_k (or v_0) finishes,
will see (v_k, v_0) as back edge

Job scheduling

Given Directed Acyclic Graph (DAG), where vertices represent tasks & edges represent dependencies, order tasks without violating dependencies

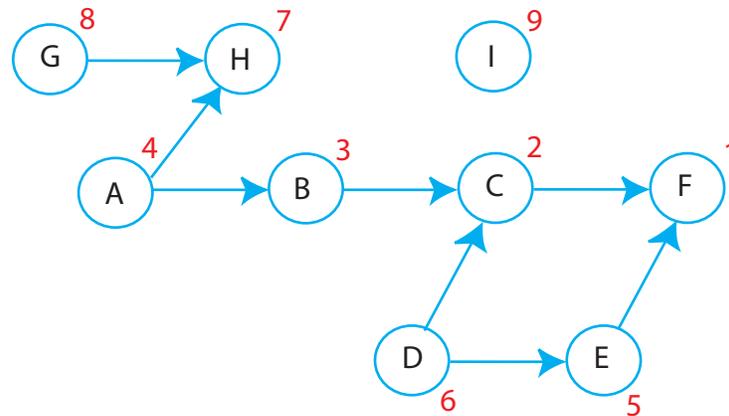Figure 6: Dependence Graph: **DFS Finishing Times****Source:**

Source = vertex with no incoming edges
 = schedulable at beginning (A,G,I)

Attempt:

BFS from each source:

- from A finds A, BH, C, F
- from D finds D, BE, CF ← slow ... and wrong!
- from G finds G, H
- from I finds I

Topological Sort

Reverse of DFS finishing times (time at which DFS-Visit(v) finishes)

```

DFS-Visit( $v$ )
...
order.append( $v$ )
order.reverse()
  
```

Correctness

For any edge $(u, v) — u$ ordered before v , i.e., v finished before u



- if u visited before v :
 - before visit to u finishes, will visit v (via (u, v) or otherwise)
 - $\implies v$ finishes before u
- if v visited before u :
 - graph is acyclic
 - $\implies u$ cannot be reached from v
 - \implies visit to v finishes before visiting u

MIT OpenCourseWare
<http://ocw.mit.edu>

6.006 Introduction to Algorithms
Fall 2011

For information about citing these materials or our Terms of Use, visit: <http://ocw.mit.edu/terms>.